

Differential pressure gauge With integrated working pressure indication Model DPG40

WIKA data sheet PM 07.20

DELTA-plus

Applications

Monitoring of filters, compressors and pumps in:

- Marine boilers, pressure vessels, bilge-water collection
- Drinking and cooling-water treatment plants
- Pressure-boosting stations
- Heating technology
- Fire-extinguishing systems

Special features

- Differential pressure gauge with integrated working pressure indication
- Robust aluminium case with shatterproof window
- Low measuring range from 0 ... 250 mbar
- High accuracy up to 1.6 %



Differential pressure gauge with integrated working pressure indication, model DPG40

Description

The differential pressure gauges of the DELTA-line product family are primarily used for the monitoring of low differential pressures where there are high requirements in terms of one-sided overpressure and static pressure.

Typical markets for these products are the shipbuilding industry, process heating technology, the heating, ventilation and air-conditioning industries, the waster/wastewater industry, and machine building and plant construction. For these, the main function of the measuring instruments is the monitoring of filters, compressors and pumps.

Often in these applications, alongside the display of the differential pressure, the current working pressure is also relevant. For this reason, a working pressure indication is integrated within the DELTA-plus differential pressure gauge as standard. The two local, easily readable, mechanical displays enable the simultaneous reading of the working and the differential pressure. Furthermore, this saves on an additional measuring and sealing point, reducing additional expense for piping and mounting.

The robust aluminium case and shatterproof window enable a long service life of the product, even under harsh ambient conditions.

As a result of the low pressure range of 0 ... 250 mbar, the instrument can also be used for applications with low differential pressures. A further key feature is the high accuracy of up to 1.6 % which is important for most applications.

The new and functional design completes the appearance of the measuring instrument.

Design and operating principle


Pressures p_1 and p_2 act on the media chambers $\oplus$ and $\ominus$, which are separated by an elastic diaphragm (1).

The differential pressure ($\Delta p = p_1 - p_2$) leads to an axial deflection of the diaphragm against the measuring range springs (2).

The deflection, which is proportional to the differential pressure, is transmitted to the movement (4) in the indicating case via a pressure-tight and low friction rocker arm (3).

Overpressure safety is provided by metal bolsters (5) resting against the elastic diaphragm.

Illustration of the principle

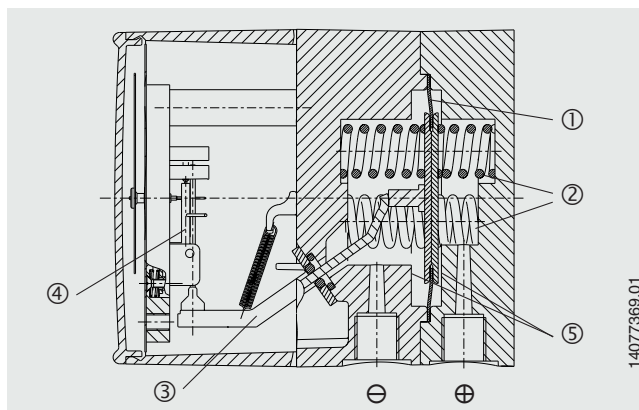

Mounting according to affixed symbols,
 $\oplus$ high pressure, $\ominus$ low pressure

Mounting by means of:

- Rigid measuring line or
- Wall mounting with available mounting links


Standard version

Specifications	DELTA-plus model DPG40
Nominal size	Differential pressure indication: Ø 100 mm Working pressure indication: Ø 22 mm
Accuracy class	Differential pressure indication: $\leq 2.5\%$ of span (option $\leq 1.6\%$) Working pressure indication: 4
Scale ranges (EN 837)	Differential pressure: 0 ... 0.25 to 0 ... 10 bar Working pressure: 0 ... 25 bar
Max. working pressure (stat.)	25 bar
Overpressure safety	Either side max. 25 bar
Permissible temperatures	Ambient: $-10 \dots +70\text{ }^{\circ}\text{C}$, medium: $-10 \dots +90\text{ }^{\circ}\text{C}$ Storage: $-40 \dots +70\text{ }^{\circ}\text{C}$
Ingress protection	IP 54 per EN 60529 / IEC 60529
Media chamber (wetted)	Aluminium, EN AC-Al Si9Cu3(Fe), black lacquered
Process connections (wetted)	2 x G 1/4 female, lower mount (LM), in-line, centre distance 26 mm
Pressure elements (wetted)	Differential pressure: Compression springs from stainless steel 1.4310 and separating diaphragm from FPM/FKM (option: NBR) Working pressure: Bourdon tube from Cu-alloy
Transmission parts (wetted)	Stainless steel 1.4301, 1.4305, 1.4310, FPM/FKM (option: NBR)
Sealings (wetted)	FPM/FKM (option: NBR)
Movement	Copper alloy, wear parts argantan
Dial	Differential and working pressure indication: White dial, black lettering
Pointer	Differential and working pressure indication: Blue pointer
Zero adjustment for differential pressure indication	Via screw in the dial
Case	Aluminium, EN AC-Al Si9Cu3(Fe), black lacquered
Window	Plastic
Weight	approx. 1.3 kg

Options


- Without working pressure indication
- Scale range for working pressure 0 ... 10 or 0 ... 16 bar (max. working pressure and overpressure safety up to 10 or 16 bar)
- Accuracy class 1.6 for differential pressure indication with scale ranges 0 ... 1 bar to 0 ... 10 bar
- Ingress protection IP 65
- 4-way valve manifold from Cu-alloy or stainless steel, (1 x pressure compensating valve, 2 x shut-off valve, 1 x valve for purging and ventilating)
- Sealings (model 910.17, see data sheet AC 09.08)
- Other process connections for female and male threads
- Compression fittings with ferrule or clamp ring for pipe diameters 6, 8 and 10 mm
- Panel mounting flange (available in 2 versions: Stainless steel or stainless steel, black lacquered)

Dimensions in mm

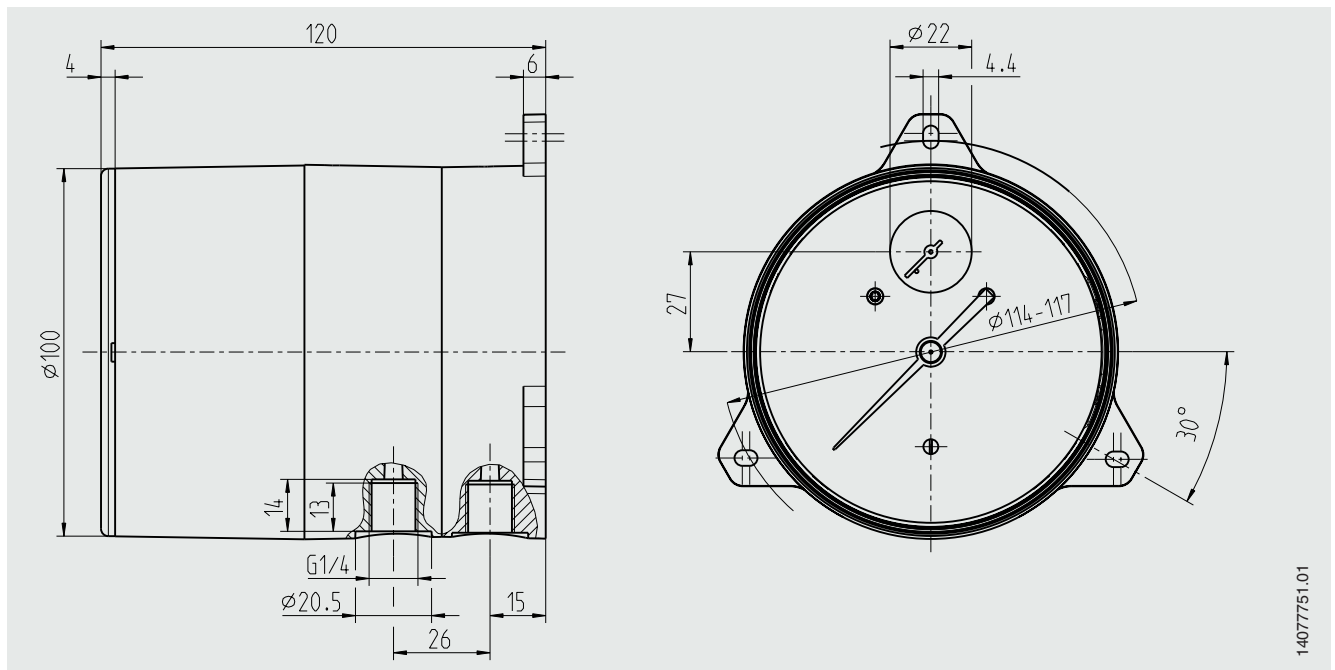


Option


Process connection variants

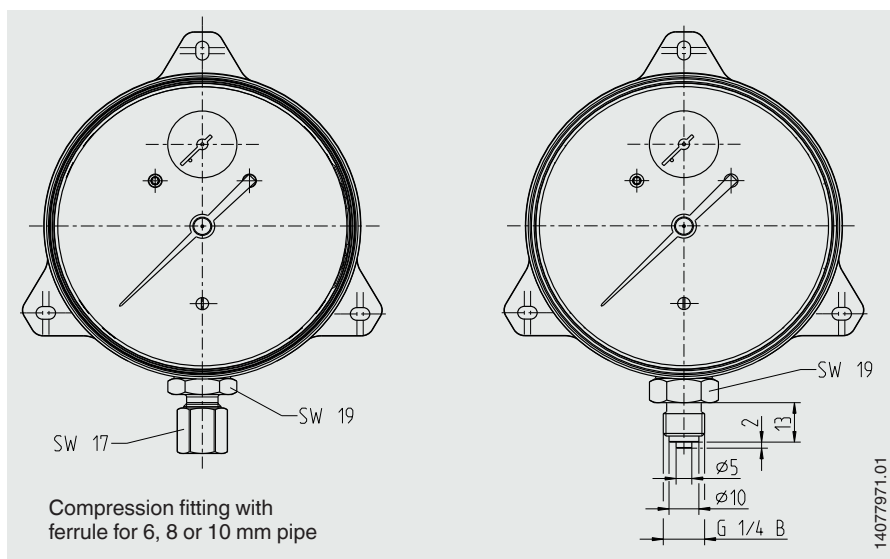

Option Panel mounting

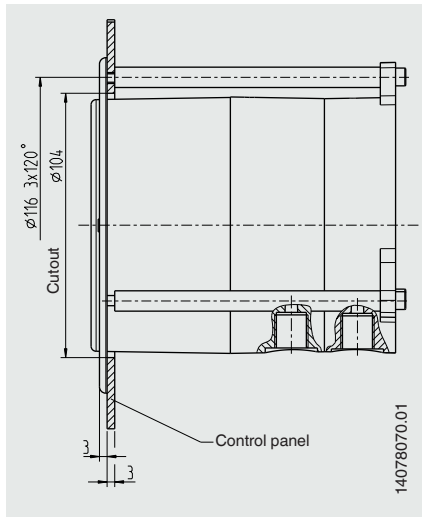

Option 4-way valve manifold

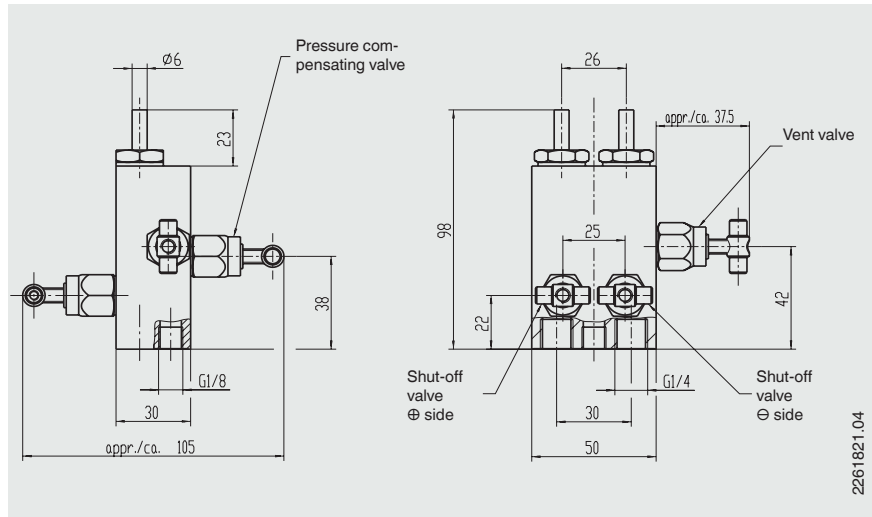

Certificates ¹⁾

- 2.2 test report per EN 10204 (e.g. state-of-the-art manufacturing, indication accuracy)
- 3.1 inspection certificate per EN 10204 (e.g. indication accuracy)

1) Option

Approvals and certificates, see website

Ordering information

Model / Scale range / Process connection / Material of separating diaphragm and sealings / Options

© 2014 WIKA Alexander Wiegand SE & Co. KG, all rights reserved.
The specifications given in this document represent the state of engineering at the time of publishing.
We reserve the right to make modifications to the specifications and materials.



WIKA Alexander Wiegand SE & Co. KG
Alexander-Wiegand-Straße 30
63911 Klingenberg/Germany
Tel. +49 9372 132-0
Fax +49 9372 132-406
info@wika.de
www.wika.de